

I.S.16004 Installation Instructions



SAVE THESE INSTRUCTIONS

LUMINAIRE ASSEMBLY:

1. Unpack luminaire head, stem & provided 20 watt T3 lamp.
2. Push lamp into socket (do not touch lamp with bare hands as oil from skin may shorten lamp life).
3. Place luminaire head over stem and thread clockwise until seated snugly.
4. Place top shade (not shown) over Luminaire head and thread until securely fastened.
5. Proceed to mounting instructions below.

LAMP / LENS REPLACEMENT:

1. Remove top shade (not shown) by turning in counter clockwise direction.
2. Grasp luminaire head below harp and turn harp in counter clockwise direction.
3. Remove harp and frosted dome lens.
4. Replace lamp and follow steps 1-3 in reverse order.

LUMINAIRE MOUNTING: (for typical ground stake mounting)

1. To prevent electrical shock, disconnect transformer from electrical supply before installation or service.
2. Run wire from Luminaire through mounting hole in top of ground stake.
3. Attached Luminaire to ground stake by threading to mounting hole in stake until it fits snugly against the bottom of stem.
4. Place stake in desired position and insert into ground until the flange of stake is flush with ground.
5. Strip the two wire leads from the Luminaire and connect to the main supply wire using the provided silicone filled wirenuts.

INSTRUCTIONS PERTAINING TO A RISK OF FIRE, OR INJURY TO PERSONS, IMPORTANT SAFETY INSTRUCTIONS.


Lighted Lamp is HOT!

WARNING – To reduce the risk of FIRE OR INJURY TO PERSONS:

- Turn off / unplug and allow to cool before replacing lamp.
- Lamp gets hot quickly! Contact only switch / plug when turning on.
- Do not touch hot lens, guard or enclosure.
- Keep lamp away from materials that may burn.
- Do not touch the lamp at any time, use a soft cloth. Oil from skin may damage lamp.
- Do not operate the luminaire fitting with a missing or damaged shield.
- Luminaires shall not be installed within 10 feet (3m) of pool, spa or fountain.
- Do not use tungsten halogen lamps unless the luminaire is marked for halogen use.

The main low voltage cable from the Luminaire is to be:

1. Protected by routing in close proximity to the luminaire or fitting, or next to a building structure such as a house or deck.
2. Not to be buried except for a maximum of 6 inches (15.2cm) in order to connect to the main low voltage cable.
3. Have the length cut off so that it is connected to a connector within 6 inches (15.2cm) from a building structure, a luminaire or fitting.

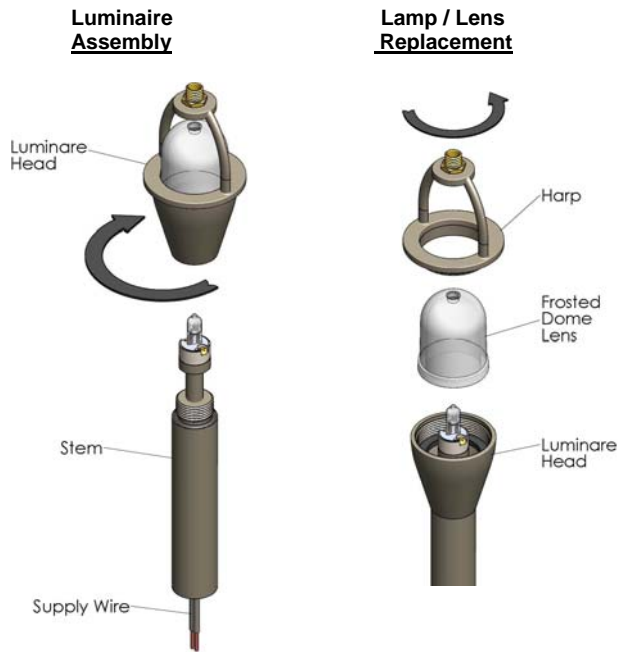

Typical Ground Stake Mounting

