


Family: Orleans | Item No. 1995 RB




▼ start here


Drawing 1 - Strap Detail

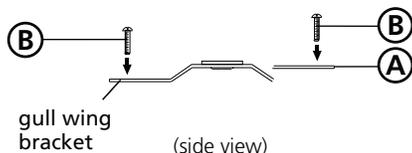

Drawing 2 - Fixture Mounting

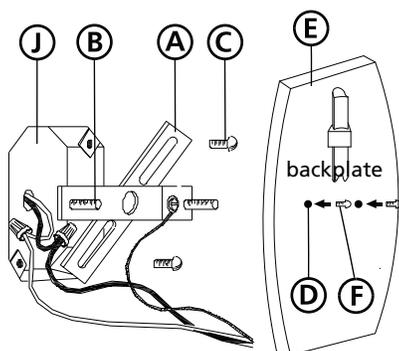

Drawing 3 - Fixture Assembly

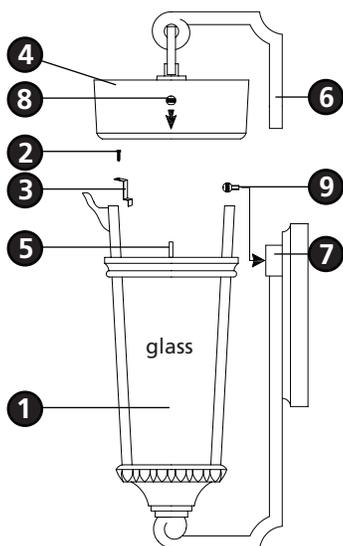

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first installing the glass, mounting the mounting strap to the junction box, making all necessary electrical connections, mounting the fixture to the wall, and then assembling the main body of the fixture.**

2

1. To install glass, remove screws (2) from main cage assembly (1), which retain the glass clips (3) in place - see **Drawing 3**.
2. Slide glass panels into cage (1), making sure bottom of glass is in front of tab in bottom of cage.
3. Replace glass clips (3) using screws (2) that were removed earlier.

3

1. Prepare mounting strap (A) by threading the two long mounting screws (B) into the back of the gull wing bracket - see **Drawing 1**.
 - Be sure the holes into which the screws are threaded match the spacing of holes (D) in the back plate (E) - see **Drawings 1 and 2**.
2. Attach mounting strap (A) to junction box (J) using two 8-32 screws (C) 1" long (not provided) - see **Drawing 2**.

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

4

Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet (I.S. 18) and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.

5

1. Slip the two mounting screws (B) through the two mounting holes in the backplate (E) - see **Drawing 2**.
2. While holding fixture in place, thread the two ball knobs (F) onto mounting screw (B) and tighten.

6

1. Prior to assembling main body, fixture can now be lamped accordingly.
2. To assemble main body, slip roof (4) over studs (5), making sure to line up top arm base (6) with square hole in block (7) - see **Drawing 3**.
3. After roof (4) and arm base (6) are in place, screw the 2 ball knobs (8) onto the end of studs (5) protruding through the roof, and tighten.
4. Slip ball knob stud (9) through hole located in the front of block (7) and thread it into hole on arm base (6).

Note: Maximum wattage for 1995 fixture is 40 watts per bulb.

2.7.08