

MUSE

FR40605BKS



Bulbs: 60W G16-1/2 CAND .

Replacement Parts: GLASS: R40600MIR; R40600PAL

ASSEMBLY INSTRUCTIONS

Assembly of this fixture will be accomplished by first assembling the body of the fixture, installing the mounting hardware to the junction box, making all necessary electrical connections, hanging the fixture and then installing the fixture glass.

SAFETY WARNING: Read wiring and grounding instructions [FRIS 18] and any additional directions. Turn power supply off during installation. If new wiring is required, consult a qualified electrician or local authorities for code requirements.

STEP 1


- 1 Slip loop (a) along wire and thread onto thread tube (b) and tighten.
- 2 Fixture can be installed at this point.

STEP 2 Refer to *Hanging Instruction Sheet [FRIS19]* to hang fixture. Then refer back to this sheet to continue installation of this fixture.

STEP 3

- 1 To install glass shades, remove socket ring (1) from threaded socket (5) - See Drawing 2.
- 2 Slip mirrored glasses (4) over socket .
- 3 Slip rubber ring (3) over socket followed by opal glass shade (2), adjust glass so it is centered and level on fixture.
- 4 Thread socket ring (1) onto socket (5) to secure glass.
- 5 Fixture can now be lamped accordingly.

[DRAWING 1]

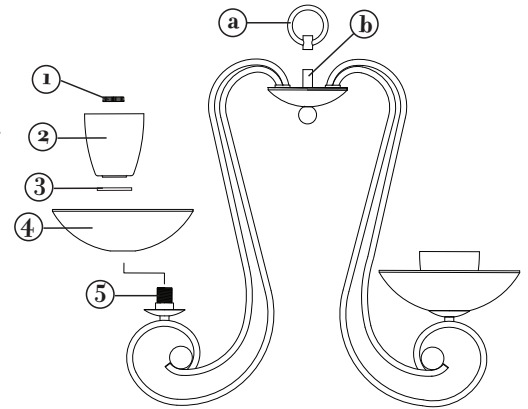

FREDRICK RAMOND

ESTABLISHED 1965

A Division of Hinkley Lighting, Inc.

33000 PIN OAK PARKWAY | AVON LAKE, OHIO 44012

toll free 800.446.5539 | phone 440.653.5500